


PCB LAYOUT MOUNTING PATTERN

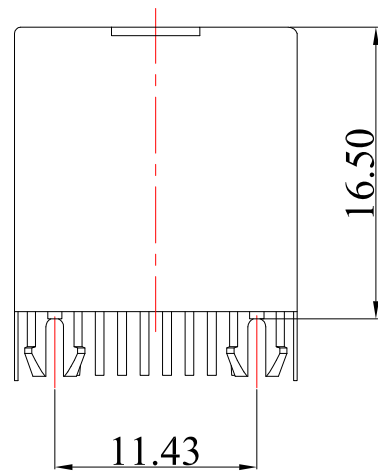

RJ45-52E811E-x-S307

鍍層厚度 :

Blank	: 1u"
1	: 3u"
2	: 15u"
3	: 30u"
5	: 6u"

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 AMP
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 500 MΩ MIN. @500 VDC
- 5.Dielectric Strength : 1000 VAC

Mechanical:

- 1.Housing : PBT,Black
- 2.Insert : PBT,Black
- 3.Contact : Phosphor Bronze , Gold Plating over Nickel
- 4.Shield : Brass, Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C



TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	RJ45
Jack Lu	08/04/21			
CHECKED BY:	DATE	FINISH	MODLE	RJ45
Jacky Chen	08/04/21			
APPROVED BY:	DATE	SCALE	DWG NO.	RJ45-52E811E-x-S307
Tony Kao	08/04/21	1 : 1		
		SHEET NO.	PART NO.	RJ45-52E811E-x-S307
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE