



P.C.B LAYOUT MOUNTING PATTERN  
(TOP VIEW)

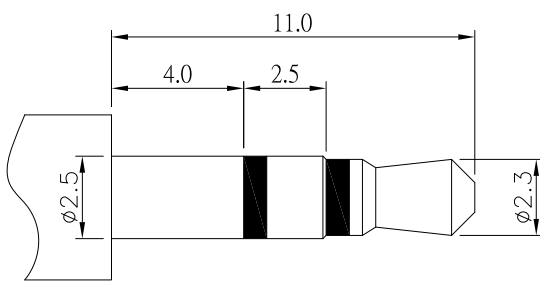

φ2.50mm 3 POLE PLUG

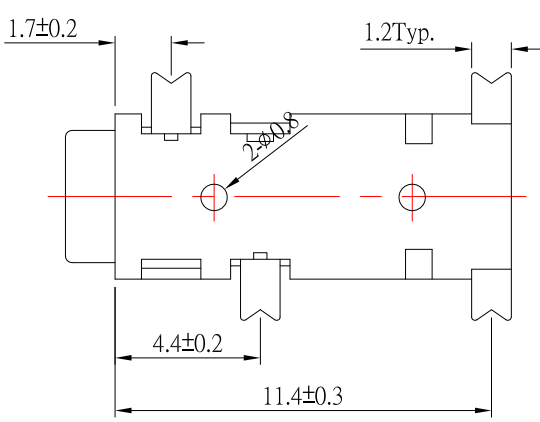

SPECIFICATION

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance : ≤30mΩ
- 3.Insulation resistance : ≥100MΩ
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

SCHEMATIC

PJ-2574	PJ-2573	PJ-2573A

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	HOUSING	1	PA9T	
4	CURVE PIECE	1	BRASS	Ag-Plating
3	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
2	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
1	SPRING	1	PHOSPHOR BRONZE	Ag-Plating



TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	04/23/21		MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-257x-S124
Jacky Chen	04/23/21	1 : 1	PART NO.	PJ-257x-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	04/23/21			

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新樣式	Jack	042321