
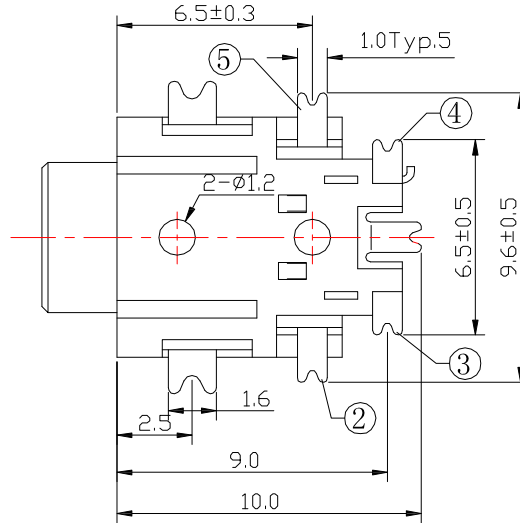
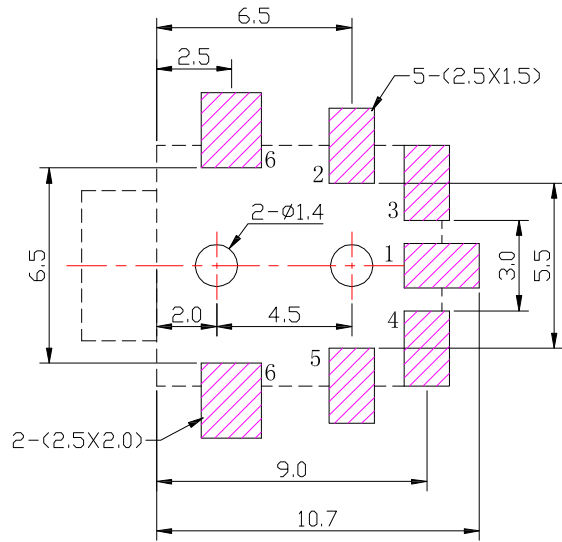


SCHEMATIC

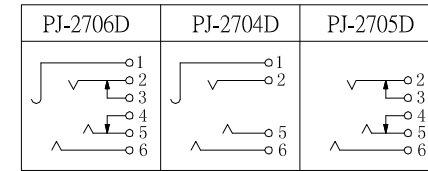

PCB LAYOUT MOUNTING PATTERN  
TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V , 1.0A
- 2.Contact resistance :  $\leq 30m\Omega$
- 3.Insulation resistance :  $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

⑦	HOUSING	1	PA9T	
⑥	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
⑤	5# CONTACT FOOT	1	SUS	Ag-Plating
④	4# CONTACT FOOT	1	BRASS	Ag-Plating
③	3# CONTACT FOOT	1	BRASS	Ag-Plating
②	2# CONTACT FOOT	1	SUS	Ag-Plating
①	1# CONTACT FOOT	1	SUS	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



TOLERANCE UNLESS OTHERWISE STATED

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	01/24/17			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	01/24/17			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-270xD-S125
Tony Kao	01/24/17	1 : 1		
SHEET NO.	1 of 1	PART NO.	PJ-270xD-S125	
				SIZE A4
				VER A0