



P.C.B LAYOUT MOUNTING PATTERN  
(TOP VIEW)

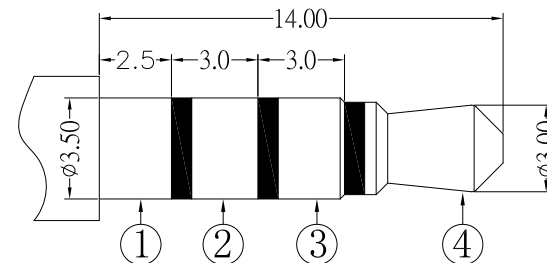

φ3.50mm 4 POLE PLUG

MODEL NO.	PJ-D3022-S124
SCHEMATIC	

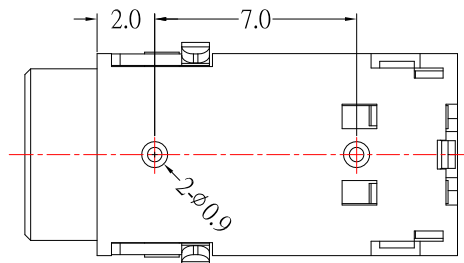

**SPECIFICATION**

- 1.Rating : DC 30V , 1.0A ;
- 2.Contact resistance : ≤ 30mΩ ;
- 3.Insulation resistance : ≥ 100MΩ ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 10,000 cycles ◦

5	HOUSING	1	PBT	
4	CONTACT FOOT #4	1	Phosphor Bronze	Sn-Plating
3	CONTACT FOOT #3	1	Brass	Sn-Plating
2	CONTACT FOOT #2	1	Phosphor Bronze	Sn-Plating
1	CONTACT FOOT #1	1	Phosphor Bronze	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	10/15/21		MODLE	PHONE JACK
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	10/15/21		DWG NO.	PJ-D3022-S124
APPROVED BY:	DATE	SHEET NO.	PART NO.	PJ-D3022-S124
Tony Kao	10/15/21	1 of 1		

2	更新尺寸公差	Jack	101521
1	更新為A0版	Jack	102616
ITEM NO.	DESCRIPTION	DRAWN	DATE