


P.C.B LAYOUT
TOP VIEW

SPECIFICATIONS

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 0.03 \Omega$;
3. Insulation resistance : $\geq 100M\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles .

SCHEMATIC

PJ-D3025	PJ-D3025-1	PJ-D3025-2	PJ-D3025-3	PJ-D3025-4

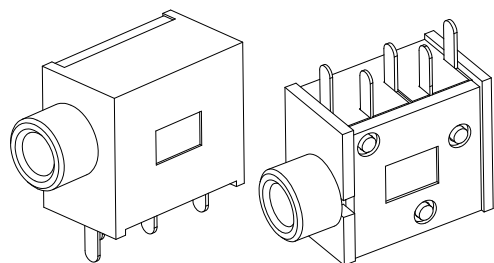

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑧	COVER	1	PBT	
⑦	HOUSING	1	PBT	
⑥	AXIS SUPPORT	1	BRASS	Ni-Plating
⑤	CURVE PIECE	1	BRASS	Sn-Plating
④	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
③	CURVE PIECE	1	BRASS	Sn-Plating
②	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
①	FLAT PIECE	1	BRASS	Sn-Plating



TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY: Jack Lu DATE: 10/05/16
 CHECKED BY: Jacky Chen DATE: 10/05/16
 APPROVED BY: Tony Kao DATE: 10/05/16

MAT'L	TITLE	JACK
FINISH	MODLE	PHONE JACK
SCALE 1 : 1	DWG NO.	PJ-D3025-S124
SHEET NO. 1 of 1	PART NO.	PJ-D3025-S124

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新為A0版	Jack	100516