
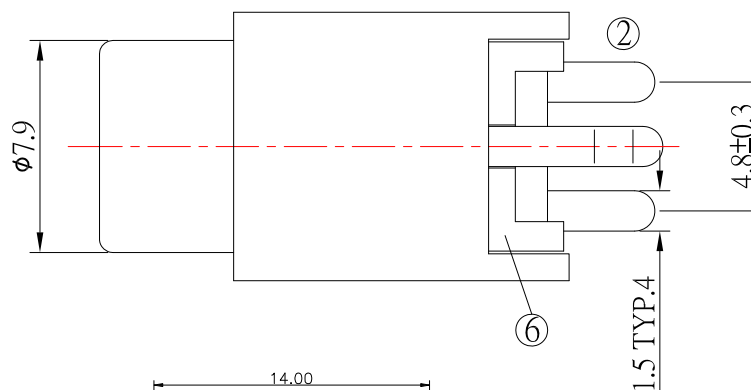




P.C.B LAYOUT
TOP VIEW

SCHEMATIC

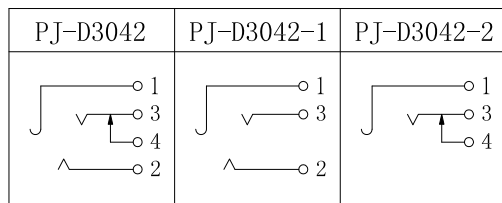

SPECIFICATION

- Rating : DC 30V 0.5A ;
- Contact resistance : ≤ 30mΩ ;
- Insulation resistance : ≥ 100MΩ ;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N;
- life test : 5,000 cycles ◦

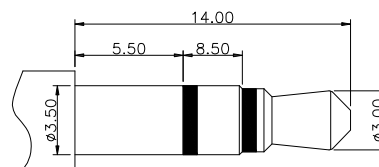

φ3.50mm 3 POLE PLUG

| NO. | DESCRIPTION | QTY | MATERIAL | PLATING |
|-----|--------------|-----|-----------------|------------|
| 6 | COVER | 1 | PBT | |
| 5 | HOUSING | 1 | PBT | |
| 4 | FLAT PIECE | 1 | BRASS | Ag-Plating |
| 3 | SPRING PIECE | 1 | PHOSPHOR BRONZE | Ag-Plating |
| 2 | FLAT PIECE | 1 | BRASS | Ag-Plating |
| 1 | CONTACT FOOT | 1 | PHOSPHOR BRONZE | Ag-Plating |

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

| | | | | |
|--------------|----------|--------|-----------|-----------------|
| DRAWN BY: | DATE | MAT'L | TITLE | SWITCH |
| Jack Lu | 06/06/17 | | MODLE | TACT SWITCH |
| CHECKED BY: | DATE | FINISH | DWG NO. | PJ-D3042-x-S124 |
| Jacky Chen | 06/06/17 | | PART NO. | PJ-D3042-x-S124 |
| APPROVED BY: | DATE | SCALE | SHEET NO. | 1 of 1 |
| Tony Kao | 06/06/17 | | | |

| ITEM NO. | DESCRIPTION | DRAWN | DATE |
|----------|-------------|-------|--------|
| 1 | 更新尺寸 | Jack | 060617 |