


P.C.B LAYOUT  
TOP VIEW

SCHEMATIC	
	M6(#3)G/M
	M4(#1)L/R
	MP(#5)
	MQ(#6)
	M1(#2)R/L
	M5(#4)M/G

SPECIFICATION

- Contact resistance :  $\leq 50m\Omega$
- Insulation resistance :  $\geq 100M\Omega$
- Withstand voltage : 250VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles

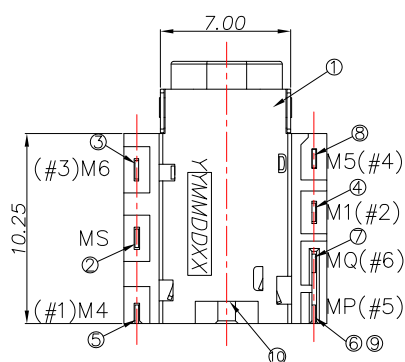

ITEM	DESCRIPTIONS	MATERIAL	FINISH	Q'TY
⑩	DUMMY PIN	STAINLESS STEEL	—	1
⑨	SEPARATOR	PA9T	BLACK	1
⑧	M5_CONTACT	PHOSPHOR BRONZE	Au: GOLD FLASH Ni	1
⑦	MQ_SHUNT	PHOSPHOR BRONZE		1
⑥	MP_CONTACT	PHOSPHOR BRONZE		1
⑤	M4_CONTACT	PHOSPHOR BRONZE		1
④	M1_CONTACT	PHOSPHOR BRONZE		1
③	M6_CONTACT	PHOSPHOR BRONZE		1
②	MS_SHELL	PHOSPHOR BRONZE	Ni	1
①	P1_HOUSING	PA9T	BLACK	1

東莞市高迪電子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5 ±0.2  
Above 5 - 15 ±0.3  
Above 15 - 30 ±0.4  
Above 30 - 50 ±0.5  
Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/07/23			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	06/07/23			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S3R2A7-HF-S214
Tony Kao	06/07/23	1 : 1		
		SHEET NO.	PART NO.	PJ-S3R2A7-HF-S214
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新樣式	Jack	060623
2	更新樣式和材質和鍍層	Jack	111722
1	新增"HP"標示	Jack	110122