
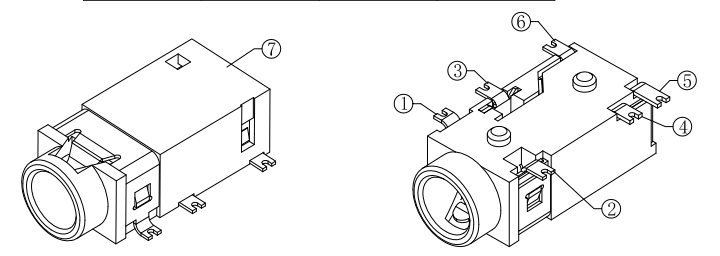


P.C.B LAYOUT  
TOP VIEW

SCHEMATIC

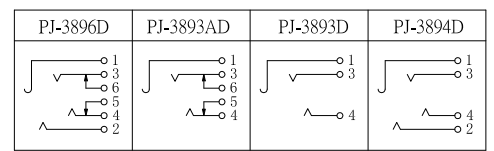

SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : ≤30mΩ
3. Insulation resistance : ≥100MΩ
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles .

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating



TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	04/11/22			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	04/11/22			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-389xD-S124
Tony Kao	04/11/22	1 : 1		
		SHEET NO.	PART NO.	PJ-389xD-S124
		1 of 1		
			SIZE	A4
			VER	R3

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新材質和SCHEMATIC選項	Jack	041122
2	新增插入示意圖	Jack	060817
1	更新為A0版	Jack	031317