

PCB LAYOYT

SPECIFICATION



- Electrical :
- 1.Rating: 1.0A
 - 2.Contact Resistance: 50 mΩ Max.
 - 3.Insulation Resistance: 1000 MΩ Min.
 - 4.Dielectec Withstanding Voltage: 250 V AC
 - 5.Operating Temperature: -30°C ~ +80°C.

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface laye

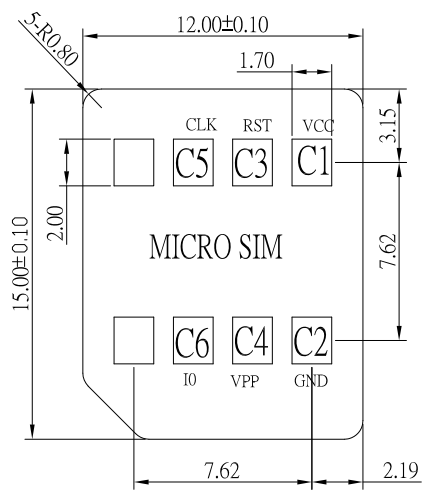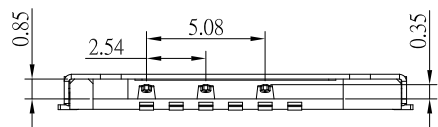

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I/O

插卡示意圖



TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	10/11/23			
CHECKED BY:	DATE	FINISH	MODLE	MICRO SIM 6PIN H1.5 掀蓋
Jacky Chen	10/11/23			
APPROVED BY:	DATE	SCALE	DWG NO.	MSIM-06H150-S267
Tony Kao	10/11/23	1 : 1	PART NO.	MSIM-06H150-S267
		SHEET NO.	1 of 1	
				SIZE A4
				VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE