




FH-C11-21xxx-S304

	L1	L2
A	3.40	2.40
B	4.30	2.40

PIN數



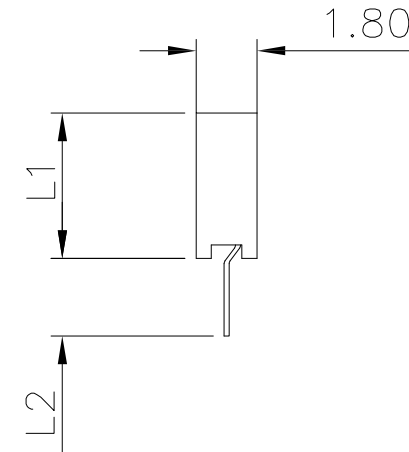


SPECIFICATIONS:

- 1.Current Rating : 1.0 A
- 2.Insulation Resistance : 1,000MΩ Min
- 3.Contact Resistance : 20mΩ Max
- 4.Operation Temperature : -40°C to +105°C

MATERIALS:

- 1.Insulator : LCP ,UL94V-0
- 2.Contact : Phosphor Bronze
- 3.Contact Plating : Gold over Nickel

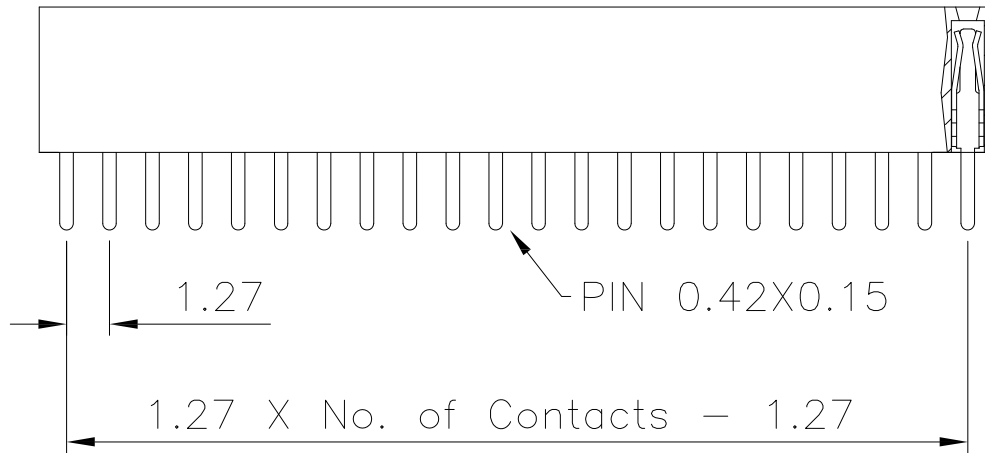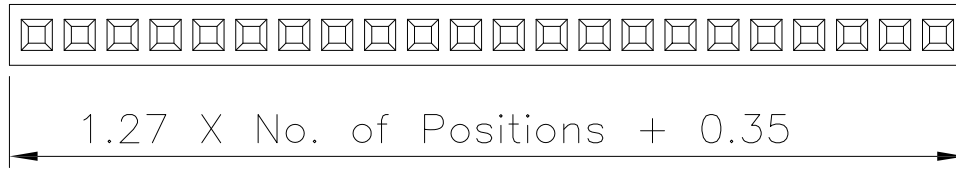

P. C. B. LayOut



TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	Female Header
Jack Lu	10/03/16			
CHECKED BY:	DATE	FINISH	MODLE	1.27 Female Header DIP
Jacky Chen	10/03/16			
APPROVED BY:	DATE	SCALE	DWG NO.	FH-C11-21xxx-S304
Tony Kao	10/03/16	1 : 1		
		SHEET NO.	PART NO.	FH-C11-21xxx-S304
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE