




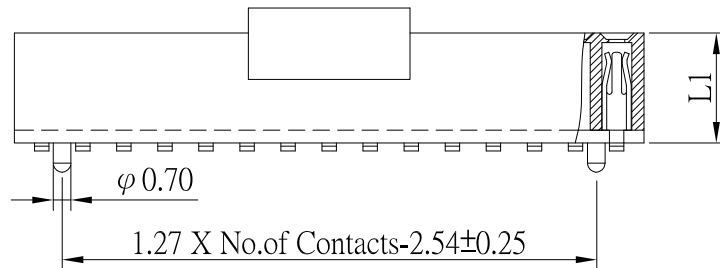

# FH-C5C1-32xxxC-S304

PIN數

	L1	L2	L3
A	4.3	4.8	3.1
B	3.4	4.8	3.0

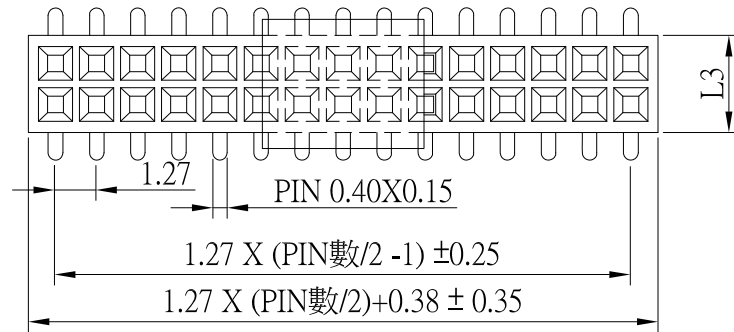


## SPECIFICATIONS:

1. Current Rating : 1.0 A
2. Insulation Resistance : 1,000MΩ Min
3. Contact Resistance : 20mΩ Max
4. Operation Temperature : -40°C to +105°C

## MATERIALS:

1. Insulator : PA6T
2. Contact : Phosphor Bronze
3. Contact Plating : Gold over Nickel

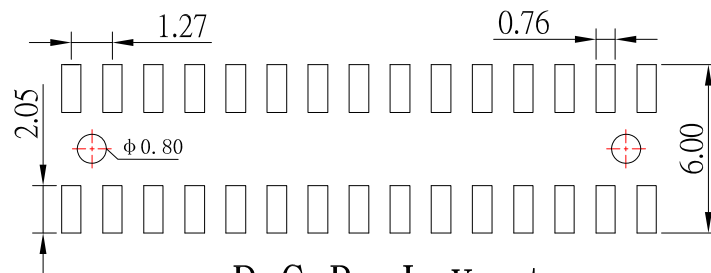

## P. C. B. Layout



TOLERANCE UNLESS OTHERWISE STATED:

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	Female Header
Jack Lu	09/17/20		MODLE	1.27 Female Header SMT 2*X PIN數加CAP
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	09/17/20		DWG NO.	FH-C5C1-32xxxC-S304
APPROVED BY:	DATE	SHEET NO.	PART NO.	FH-C5C1-32xxxC-S304
Tony Kao	09/17/20	1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增選項	Jack	091720