

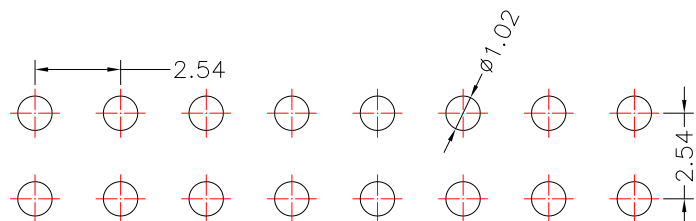


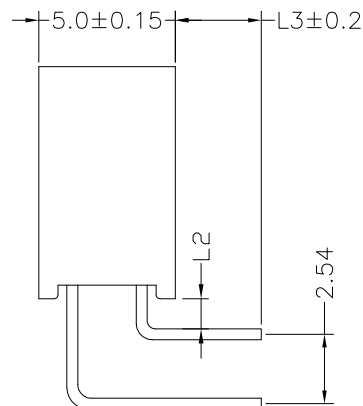

FH-A12-02xxx-S304

PIN數

	L1	L2	L3
A	8.5	1.2	3.1

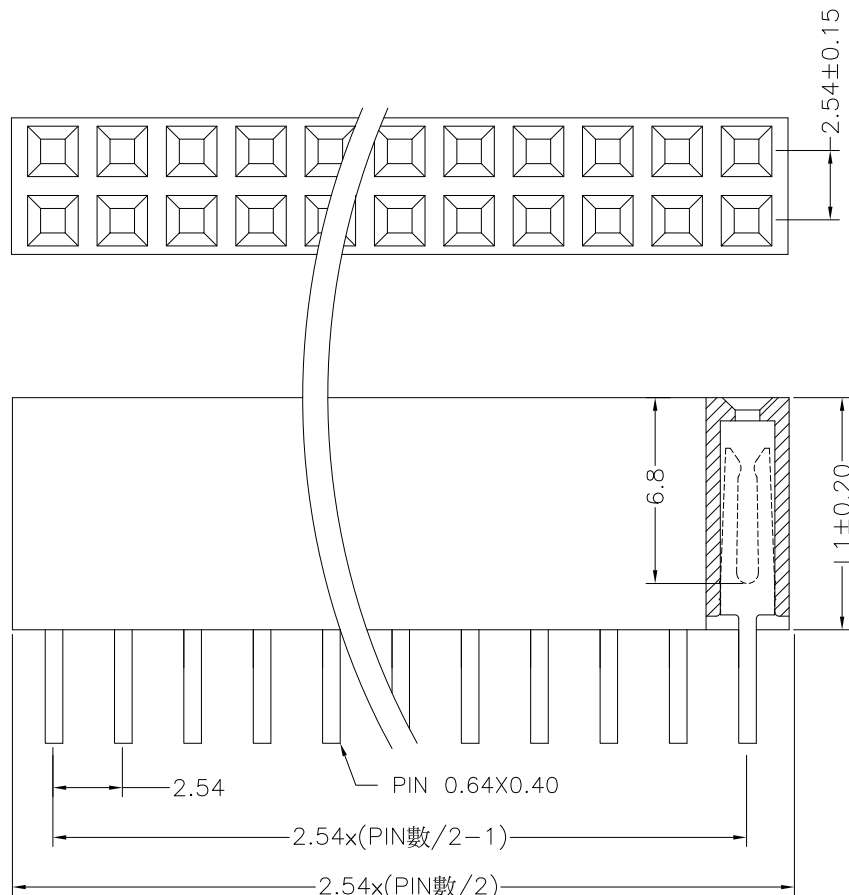

P.C.B. LAYOUT

SPECIFICATIONS:

- 1.Current Rating : 3.0 AMP
- 2.Insulation Resistance : 1000MΩ Min
- 3.Dielectric Withstanding : 1000V AC
- 4.Contact Resistance : 20mΩ Max
- 5.Operation Temperature : -40°C to +105°C

MATERIALS:

- 1.Contact : Phosphor Bronze
- 2.Insulator : PBT ,UL94V-0
- 3.Contact Finish : Gold over Nickel

ITEM NO.	DESCRIPTION	DRAWN	DATE



TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	Female Header
Jack Lu	08/07/17			
CHECKED BY:	DATE	FINISH	MODLE	2.54 排母 雙排 R/A
Jacky Chen	08/07/17			
APPROVED BY:	DATE	SCALE	DWG NO.	FH-A12-02xxx-S304
Tony Kao	08/07/17	1 : 1	PART NO.	FH-A12-02xxx-S304
		SHEET NO.	1 of 1	

SIZE	A4
VER	R