



# PH-B21-31xxx-S304

PIN數





	L1	L2	L3
A	6.0	4.0	3.0
B	6.0	4.5	3.0
C	2.0	4.5	2.0
D	1.5	4.3	1.5
E	4.0	4.2	2.8
F	4.0	8.2	2.8

## Specifications

- 1.Current Rating : 1.5 Amp
- 2.Insulator Resistance : 1000 MΩ Min.
- 3.Contact Resistance : 20 mΩ Max.
- 4.Dielectric Withstanding : AC 500 V
- 5.Operating Temperature : -40°C ~ +105°C

## Materials:

- 1.Contact Material : Phosphor Bronze, Au over Ni
- 2.Insulator Material :PA6T

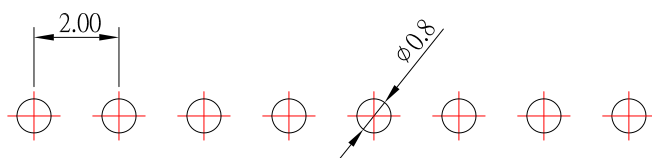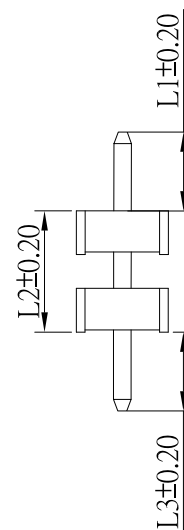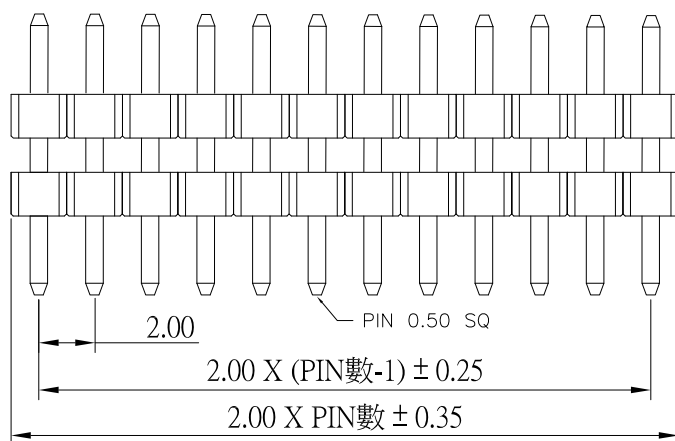

## PCB LAYOUT

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	新增PIN選項	Jack	071819
3	新增PIN選項	Jack	060319
2	新增PIN選項	Jack	022317
1	新增PIN選項	Jack	112516



TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MATL	TITLE	Pin Header
Jack Lu	07/18/19			
CHECKED BY:	DATE	FINISH	MODLE	2.0排針 雙塑單排 180度
Jacky Chen	07/18/19			
APPROVED BY:	DATE	SCALE	DWG NO.	PH-B21-31xxx-S304
Tony Kao	07/18/19	1 : 1		
		SHEET NO.	PART NO.	PH-B21-31xxx-S304
		1 of 1		

SIZE
A4
VER
R4