

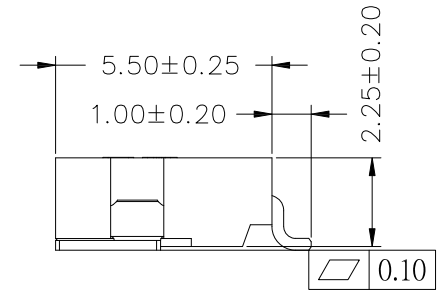
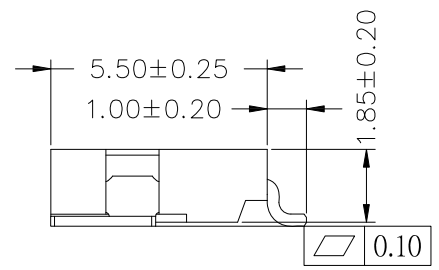
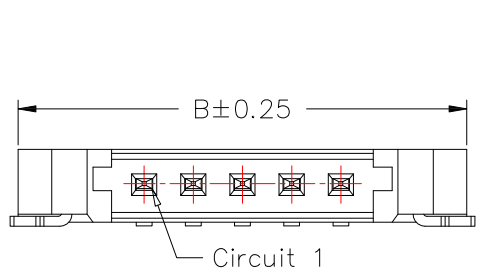


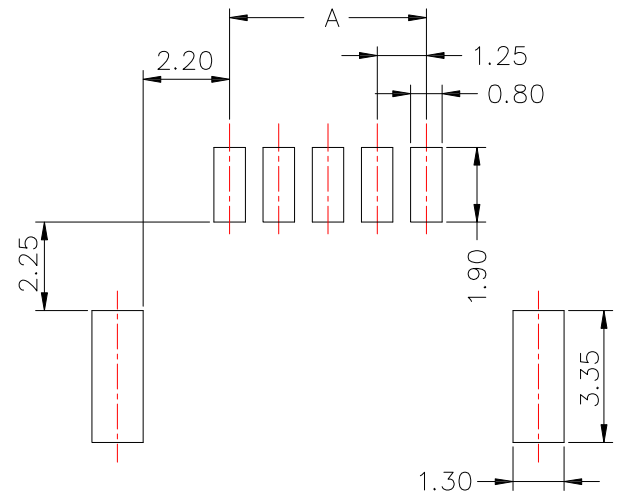

**SPECIFICATIONS**

Current rating : 1.0A AC , DC  
 Voltage rating : 125V AC , DC  
 Temperature rating : -25°C ~ +85°C  
 Insulation resistance : 100MΩ min.  
 Withstand voltage : 500V AC/minute  
 Contact resistance : 20mΩ/Max  
 Material:  
 Housing : PA6T  
 Contact : Brass,Gold plated

**P.C.B LAYOUT MOUNTING PATTERN**

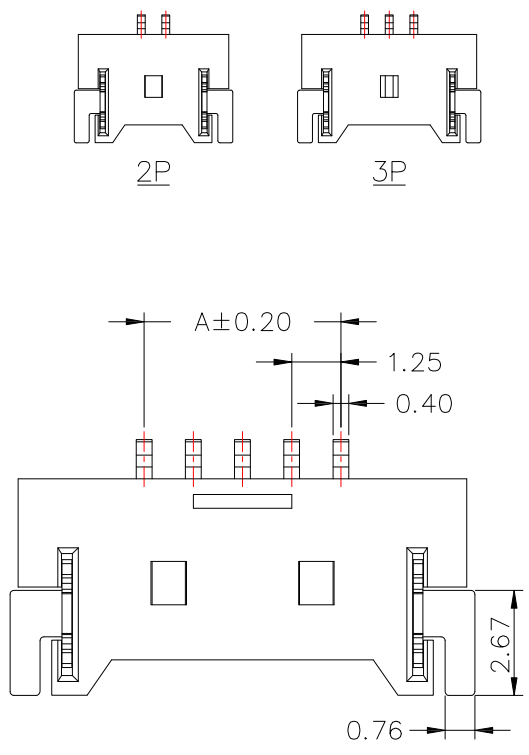

PIN NO.	Dimension mm	
	A	B
02	1.25	7.65
03	2.54	8.90
04	3.75	10.15
05	5.00	11.30
06	6.25	12.65
07	7.50	13.90
08	8.75	15.15
09	10.00	16.40
10	11.25	17.65
11	12.50	18.90
12	13.75	20.15
13	15.00	21.40
14	16.25	22.65
15	17.50	23.90
20	23.75	30.15
30	36.25	42.65

**東莞市高迪電子有限公司**  
**DONG GUAN GAO DI ELECTRONICS CO., LTD**

TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	07/12/18			
CHECKED BY:	DATE	FINISH	MODLE	WAFER 1.25 SMT 90度 超薄
Jacky Chen	07/12/18			
APPROVED BY:	DATE	SCALE	DWG NO.	WF-1253RSxx-S304
Tony Kao	07/12/18	1 : 1	PART NO.	WF-1253RSxx-S304
		SHEET NO.	1 of 1	
				SIZE A4
				VER R1

ITEM NO.	DESCRIPTION	DRAWN	DATE