



P.C.B LAYOUT

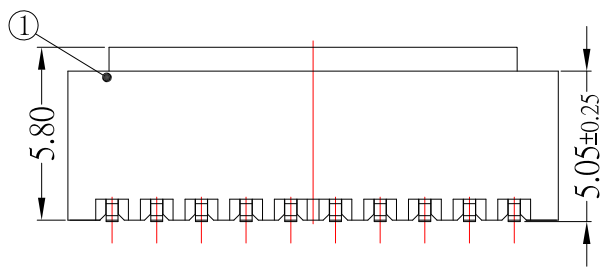

CKT	DIM A	DIM B	DIM C
2	1.50	3.35	4.46
3	3.00	4.85	5.96
4	4.50	6.35	7.46
5	6.00	7.85	8.96
6	7.50	9.35	10.46
7	9.00	10.85	11.96
8	10.50	12.35	13.46
9	12.00	13.85	14.96
10	13.50	15.35	16.46
11	15.00	16.85	17.96
12	16.50	18.35	19.46
13	18.00	19.85	20.96
14	19.50	21.35	22.46
15	21.00	22.85	23.96
16	22.50	24.35	25.46

SPECIFICATIONS

1. Current rating : 3.0A , AC / DC
2. Voltage rating : 350V, AC / DC
3. Temperature rating : -25°C ~ +85°C
4. Insulation resistance : 1000MΩ min.
5. Contact resistance : 20mΩ / Max

Material:

1. Housing : LCP
2. Contact : Brass, Tin over Nickel

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	041124

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	04/11/24			
CHECKED BY:	DATE	FINISH	MODLE	WAFER P : 1.50mm SMT 180度
Jacky Chen	04/11/24			
APPROVED BY:	DATE	SCALE	DWG NO.	WF-1500VSxx-S304
Tony Kao	04/11/24	1 : 1	PART NO.	WF-1500VSxx-S304
		SHEET NO.	1 of 1	
				SIZE A4
				VER R1