


P.C.B LAYOUT MOUNTING PATTERN

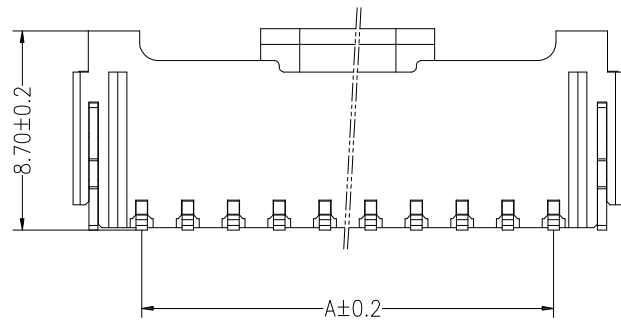

PIN.	DIMA	DIMB	DIMC
02	2.00	8.00	4.55
03	4.00	10.00	6.55
04	6.00	12.00	8.55
05	8.00	14.00	10.55
06	10.00	16.00	12.55
07	12.00	18.00	14.55
08	14.00	20.00	16.55
09	16.00	22.00	18.55
10	18.00	24.00	20.55
11	20.00	26.00	22.55
12	22.00	28.00	24.55
13	24.00	30.00	26.55
14	26.00	32.00	28.55
15	28.00	34.00	30.55

SPECIFICATIONS

Current rating : 3.0A AC , DC
 Voltage rating : 250V AC , DC
 Temperature rating : -25°C ~ +85°C
 Insulation resistance : 1,000MΩ min.
 Withstand voltage : 800V AC/minute
 Contact resistance : 20mΩ/Max
 Material:
 Housing : PA6T
 PIN : Brass / Tin-Plated
 SOLDER TABS : Brass / Tin-Plated



TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	09/08/20			
CHECKED BY:	DATE	FINISH	MODLE	WAFER P : 2.0mm SMT 180度
Jacky Chen	09/08/20			
APPROVED BY:	DATE	SCALE	DWG NO.	WF-2019VSxx-S304
Tony Kao	09/08/20	1 : 1	PART NO.	WF-2019VSxx-S304
		SHEET NO.	1 of 1	

ITEM NO.	DESCRIPTION	DRAWN	DATE