

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Current rating : 3.0A AC , DC



Voltage rating : 250V AC , DC

Temperature rating : -25°C ~ +85°C

Insulation resistance : 1,000 MΩ min.

Withstand voltage : 1,000V AC/minute

Contact resistance : 20 mΩ/Max

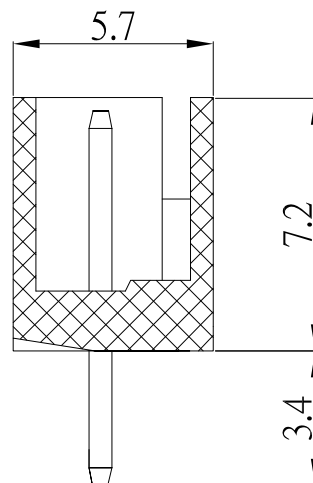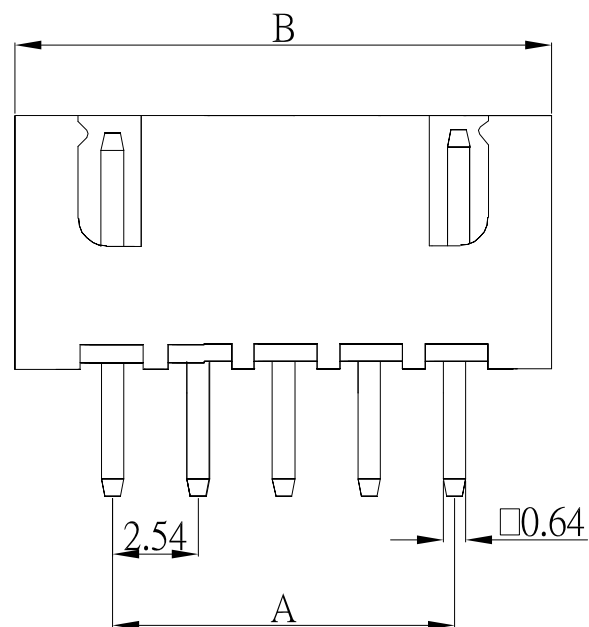

Pin	A	B
2	2.5	7.5
3	5.0	10.0
4	7.5	12.5
5	10.0	15.0
6	12.5	17.5
7	15.0	20.0
8	17.5	22.5
9	20.0	25.0
10	22.5	27.5
11	25.0	30.0
12	27.5	32.0

東莞市高迪電子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao  
DATE: 03/28/17

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	WAFER 2.54 DIP 180度
SCALE	1 : 1	DWG NO.	WF-2547VDxx-S304
SHEET NO.	1 of 1	PART NO.	WF-2547VDxx-S304

ITEM NO.	DESCRIPTION	DRAWN	DATE