
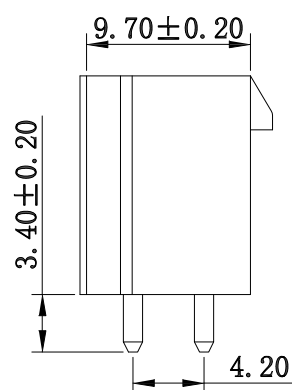


P.C.B LAYOUT MOUNTING PATTERN

PART NO.	Dimensions (mm)	
	A	B
02	—	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

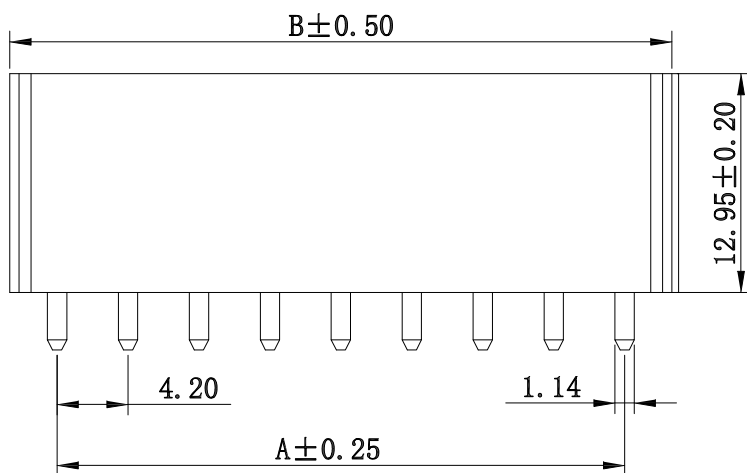

SPECIFICATIONS

Current rating : 7.0A AC , DC
 Voltage rating : 250V AC , DC
 Temperature rating : -25°C ~ +85°C
 Insulation resistance : 1,000 MΩ min.
 Withstand voltage : 1500V AC/minute
 Contact resistance : 10 mΩ max.
 Material:
 Housing : Nylon 66
 Pin : Brass / Tin-plated

				東莞市高迪電子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD				DRAWN BY: Jack Lu		DATE: 07/05/19	MATL		TITLE: CONNECTOR
								CHECKED BY: Jacky Chen		DATE: 07/05/19	FINISH		MODLE: MINI FIT JR VERTICAL POWER CONNECTOR
				APPROVED BY: Tony Kao		DATE: 07/05/19	SCALE: 1 : 1	DWG NO.:	WF-4255VD2xx-S304	SIZE: A4			
				TOLERANCE UNLESS OTHERWISE STATED :		3RD. ANGEL'S	UNITS: MM	SHEET NO.:	1 of 1	PART NO.:	WF-4255VD2xx-S304	VER: R1	
ITEM NO.	DESCRIPTION	DRAWN	DATE	Up to 5	±0.2								
				Above 5 ~ 15	±0.3								
				Above 15 ~ 30	±0.4								
				Above 30 ~ 50	±0.5								
				Angle	±0.3°								