
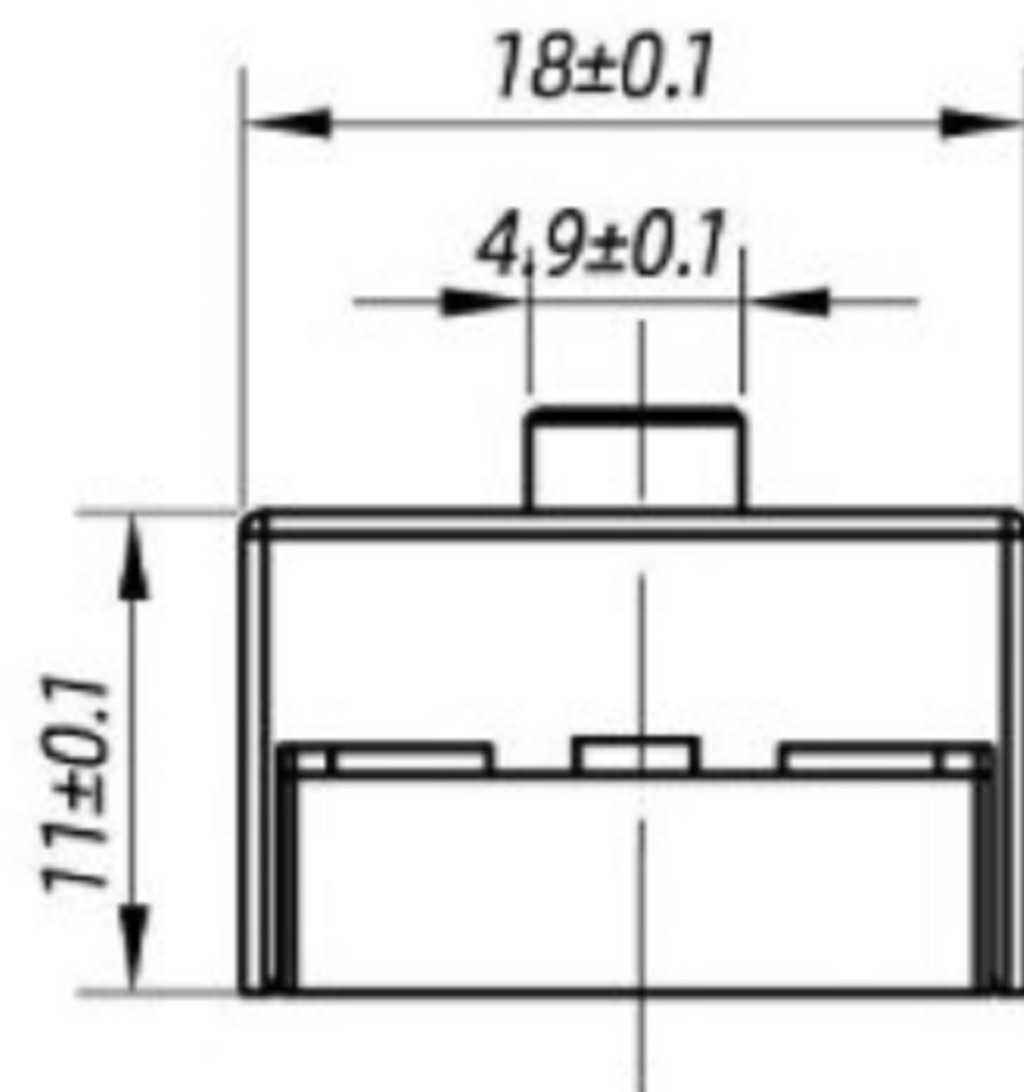
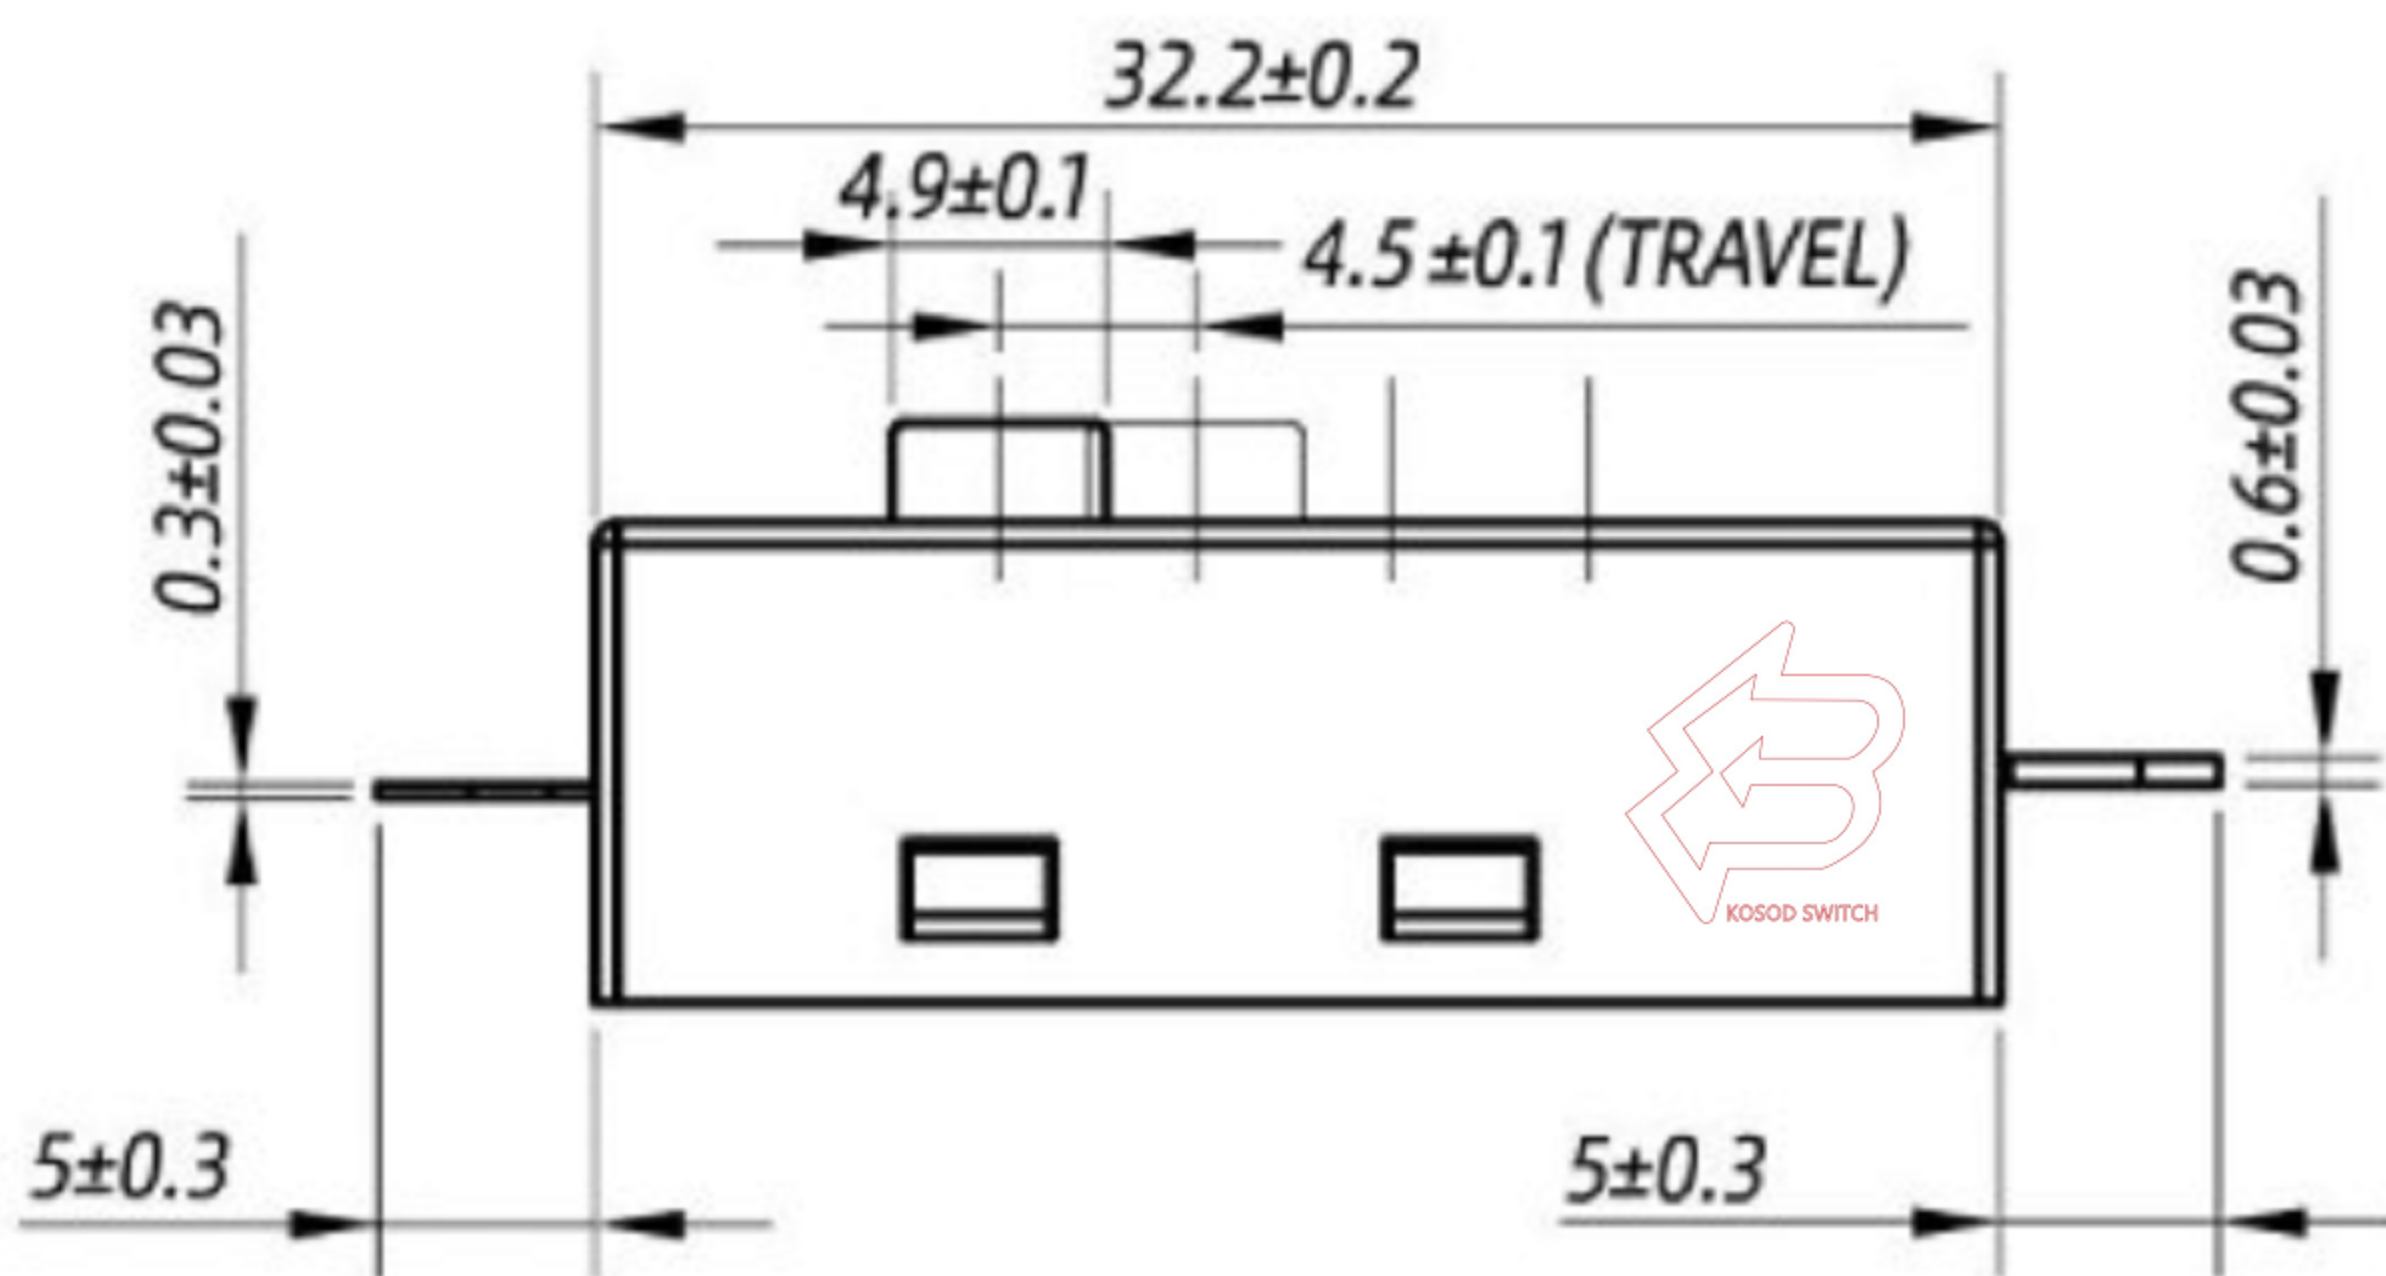


线路图
CIRCUIT DIAGRAM

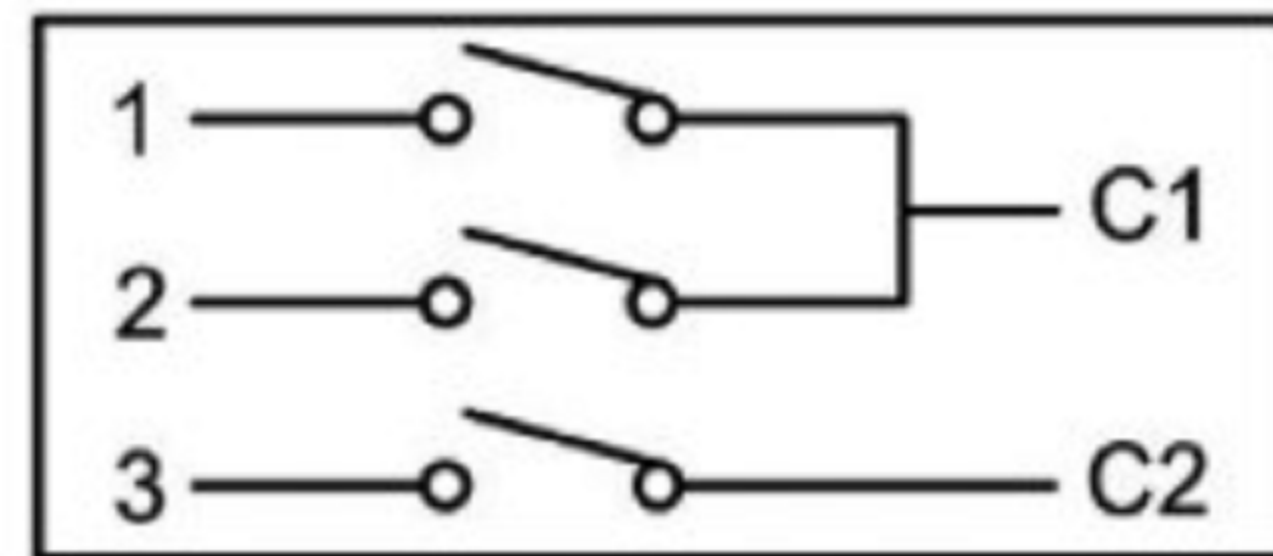

四档滑动开关

- 滑动开关型号 SLIDE SWITCH MODEL: KND-2-3BS001
- 焊线端子 SOLDER CONNECTOR TYPE:
双刀四掷, 多回路 DOUBLE POLE FOUR THROW, MULTI-CIRCUIT
- 额定值 RATING: ▲ 16(4)A 125/250VAC μ T105
10(2)A 125/250VAC μ T105
- 接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
- 绝缘电阻 INSULATION RESISTANCE: \geq 100M Ω (DC500V/1MIN)
- 介电强度 DIELECTRIC STRENGTH: 1500V /5mA /1MIN
- 机械寿命 MECHANICAL LIFE: >50000 CYCLES
- 电气寿命 ELECTRICAL LIFE: >10000 CYCLES
- 端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX260°C, 3S
- 操作力 OPERATION FORCE: 550 \pm 150gf
- 所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

电流电路
CURRENT CIRCUIT

CIRCUIT:001

位置 POSITION	电路 CIRCUIT
1 (INITIAL) 起始	OFF
2	C1+2, C2+3
3	C1+1, C2+3
4	C1+1+2, C2+3

NO.	PARTS	MATERIALS	QTY	FINISH
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED
4	TERMINAL	BRASS	3	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	POM	1	BLACK




东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5 \pm 0.2
Above 5 ~ 15 \pm 0.3
Above 15 ~ 30 \pm 0.4
Above 30 ~ 50 \pm 0.5
Angle \pm 0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY: DATE
Ming Ming Zou 11/19/14
CHECKED BY: DATE
Ning Ning Su 11/19/14
APPROVED BY: DATE
Jia Xiang 11/19/14

MAT'L	TITLE	SWITCH
FINISH	MODLE	SLIDE SWITCH
SCALE	DWG NO.	GD-KND-2-3BS001
SHEET NO.	PART NO.	

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增SPEC	Jack	111914
1	新增尺寸	Jack	061614

SIZE A4
VER R2